
* 01-00029-00-FP CONTRACT NO. 83825



<u>LEGEND</u>

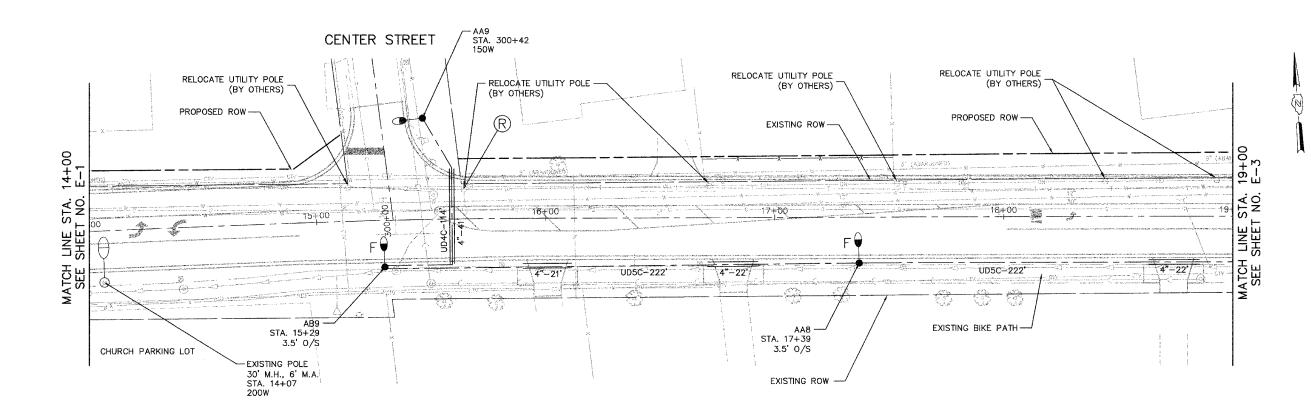

LIGHT POLE, 35' M.H., 10' MAST ARM, AND LUMINAIRE, 200W, UNLESS OTHERWISE NOTED

UTILITY POLE MOUNTED MAST ARM, LUMINAIRE TO BE REMOVED BY OTHERS

EXISTING LIGHT POLE, SIZE AS NOTED

UNIT DUCT WITH 4-1/C NO. 4 AND 1/C NO. 6 GROUND 600V (EPR-TYPE RHW) 1-1/2" POLYTHYLENE AND LENGTH AS NOTED UD5C-10' GALVANIZED STEEL CONDUIT, PUSHED, DIAMETER AND LENGTH AS NOTED

PROPOSED LIGHTING CONTROLLER, 120/240V, 100A PROPOSED SERVICE CONNECTION

OFFSET FOUNDATION

- ALL POLES SHALL BE OFFSET 8' FROM EDGE OF PAVEMENT TO CENTER OF POLE, UNLESS OTHERWISE NOTED
- 2. EXISTING UTILITY POLE MOUNTED LUMINAIRES SHALL REMAIN IN USE DURING CONSTRUCTION.

E-2



Clioriba Giroup, Inc. CONSULTING ENGINEERS 507 North Cumberland Avenue, Suite 402 Chicago, Illinois 90856 19. 173.778.4009 Fax 773.775.4014 Email discapolipida com

VILLAGE OF MOKENA LAPORTE ROAD REHABILITATION LAPORTE ROAD IMPROVEMENTS LIGHTING PLAN STATION 14+00 TO 19+00

DESIGN: KDM DRAWN: KDM CHECKED: JMV DATE: <u>DEC. 2005</u> SCALE: <u>1"=20'</u> FILE NO.: 3232